




159.00 EUR
incl. 19% VAT, plus [shipping](#)

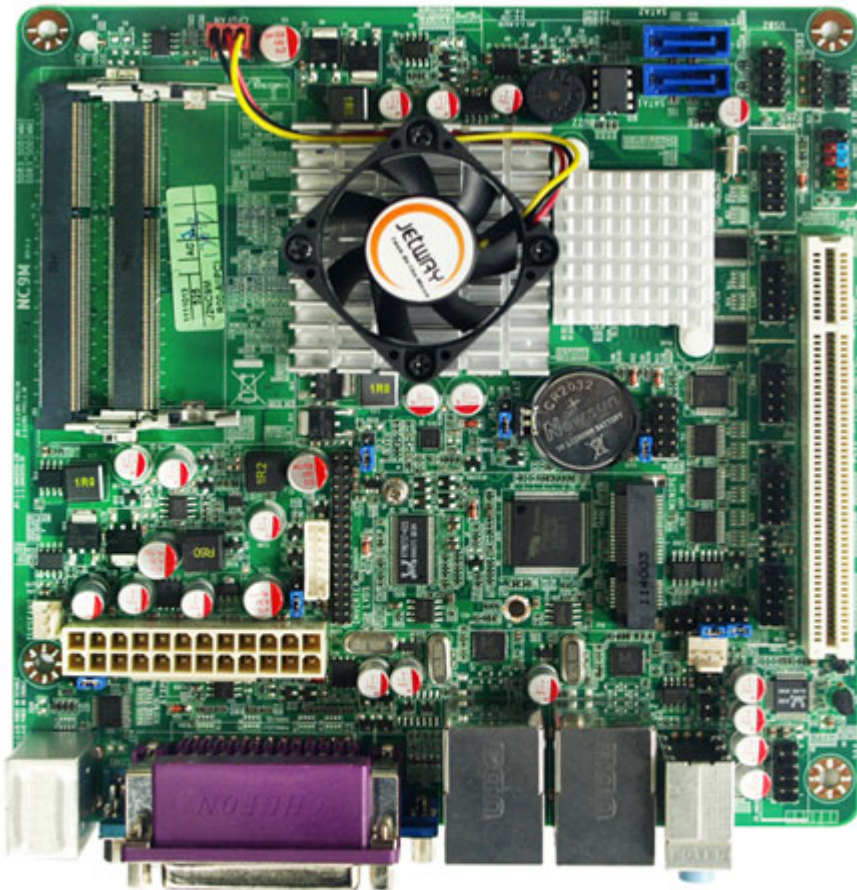

Support:  [Specifications \[EN\]](#)

- Intel Atom D525 + NM10 Chipset
- Support INTEL® Atom Dual-Core D525 CPU
- Support 2 * 3Gb/s SATA■
- Support 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- Supports 2 * Gigabit LAN
- Support 6 * COM ports (COM2 for RS232/422/485)
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support Watchdog Technology
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)
- **CPU**
 - INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHz,1024MB L2 Cache)
- **Chipset**
 - INTEL® Atom D525 + NM10
- **Memory**
 - 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- **Expansion Slots**
 - 1 * PCI slot, 1 * Mini PCI-E socket
- **Storage**
 - 2 * Serial ATA2 3Gb/s connectors
- **Audio**
 - Realtek ALC662 6-Channel HD Audio CODEC
- **Ethernet LAN**
 - 2 * Realtek RTL8111EVL Gigabit LAN
- **LVDS**
 - Onboard 18-bit single channel LVDS connector

-
- **USB**
 - Embedded 7 * USB 2.0/1.1
 -
 - **Rear Panel I/O**
 - 4 * USB 2.0/1.1 ports
 - 1 * PS/2 Mouse & Keyboard connector
 - 2 * RJ-45 port
 - 3 * Audio I/O ports (Line-in, Mic and Line-out)
 - 1 * VGA port
 - 1 * COM port
 - 1 * Parallel port
 - **Internal I/O**
 - 3 USB 2.0 ports
 - 3 * NB / Chassis Fan connectors;
 - 1 * 24-pin ATX Power connector
 - 1 * LVDS header/ 1* CD IN /1 * GPIO
 - 1 * AUDIO header
 - 5 * COM headers (COM2 for RS232/RS422/RS485)
 - **BIOS**
 - AMI 8MB DIP Flash ROM
 - **Functional**
 - ATM, Automation, Medical Equipment, Networking, POS Machine, General Application, Transportation
 - **Packing**
 - Color Box Dimension■200(W) x 200(D) x 70(H)mm
 - **Certificate**
 - CE, FCC, RoHS
 - **Temperature**
 - Operating within 0~40 centigrade
 - Storage within -20-85 centigrade
 - **Form Factor**
 - Mini ITX Form Factor(17cmx17cm)

Product Accessories

- 3x COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield