


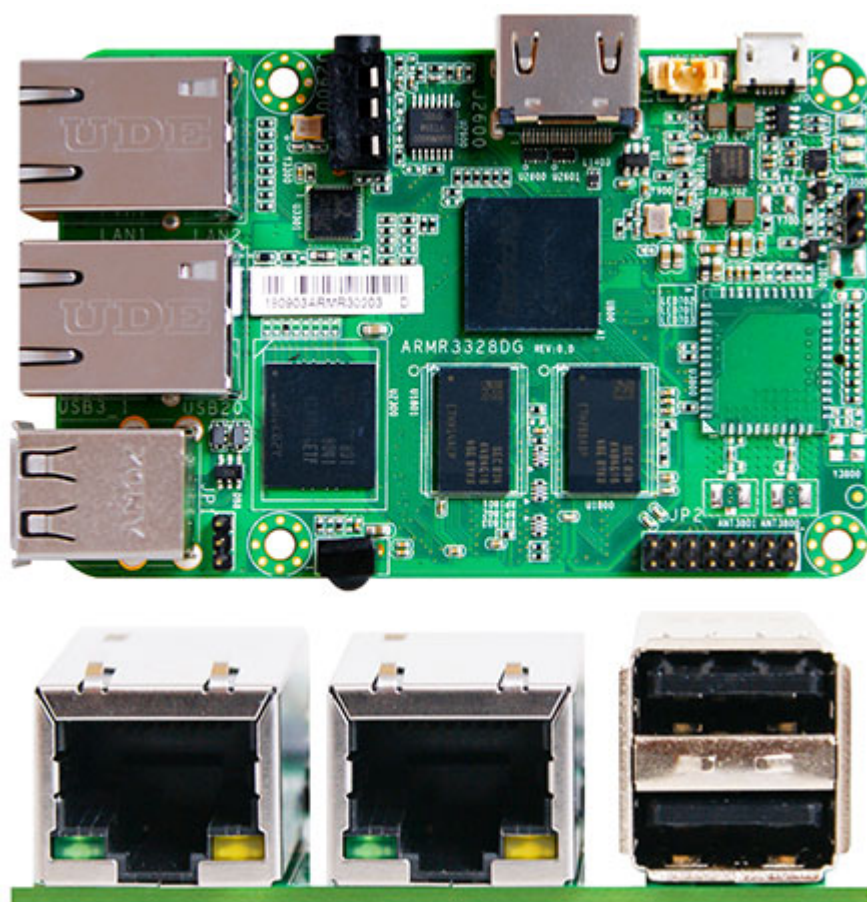

189.00 EUR
incl. 19% VAT, plus [shipping](#)

- Rockchip® ARM Cortex A53 RK3328 Quad-core 1.5GHz
- Onboard 1600 /2GB DDR3L DRAM (Max. 4GB)
- 8G Flash ROM (Max 32GB)
- Support 1* GbE and 1* 10/100M LAN
- Support 10bit GPIO
- 1* HDMI (3840 x 2160@60Hz)
- 2* USB2.0, 1* OTG, 1* HDMI, 1* Line-out
- 1.8" Form Factor (85*56mm)

Model	
Model	– JR3328-DG2NL
Part Number	– JR3328-DG2NL
Form Factor	
Dimensions	– 1.8" SBC (85* 56mm)
Processor System	
Processor/CPU	-Rockchip® ARM Cortex A53 RK3328 Quad-core 1.5GHz SoC Processor
GPU	– Mali-450MP2, Support OpenGL ES1.1/2.0
Memory	
DRAM	– 2GB DDR3L 1600MHz on-board (Max. 4GB)
Flash ROM	– 8GB (Max. 32GB)
Ethernet	
Ethernet	– 1 * 10/100 Mbps internal FE PHY – 1 * Realtek RTL8211F-CG / 10/100/1000Mbps
Wifi	– Optional

3G/4G/LTE	– N/A
Graphics	
HDMI	– 1 * HDMI (3840 x 2160@60Hz)
Multi Display	– Single display
Expansion Slot	
Micro SD Socket	– 1 (Max. 64G)
Special Features	
IR Support	– Yes
OS Support	– Android 7.1
Watchdog Timer	– 0~255 Sec./Min. programmable
Application	– Digital signage, Face recognition system
I/O Port	
External I/O	– 1* HDMI – 2* RJ45 – 2* USB2.0 – 1* OTG – 1* AUDIO
Internal I/O	– 10bit GPIO
Power Requirements	
Input PWR	5V DC-in – AT : Directly PWR on as Power input ready – ATX : Press Button to PWR on after Power input ready
Certifications	
Certifications	– RoHS, CE, FCC, CE-LVD
Environment	
Temperature	– Operating: -10°C ~ 60°C with 0.7 m/s air flow – Storage: -20°C ~ 70°C
Warranty	
Warranty	– 1 Year Limited Warranty
Life Cycle	– Till 2022 Q1